

GARDEN HOSE COILER



Automatic Control



High Speed



Very Stable

DUAL STATION COILER

Coiling of a Wide Range of Hoses.

Automatic Switching from one Coiling Station to the other.

Automatic Control of Coiling Tension, Hose Tension and Maximum Tension.

Very Stable and Precise Layering with Air Injection inside the hose whilst coiling.

Linear Speed (**Max. Speed 60m/min**) automatically synchronised with Extrusion Speed, thereby controlling Hose Tension.


Foot Operated Pedal provided to facilitate both the Start-Up of a New Hose as well as the strapping of a Finished Coil.

Total Control of The Coiling Process via HMI recording Statistical Production Data.

Recipes for Different Products can be set and stored including Hose OD & Thickness, Hose Length for each coil, Overall Dimensions of the coil etc. etc.

Optional:

Automatic Strapping and Discharge - Automatic Mode

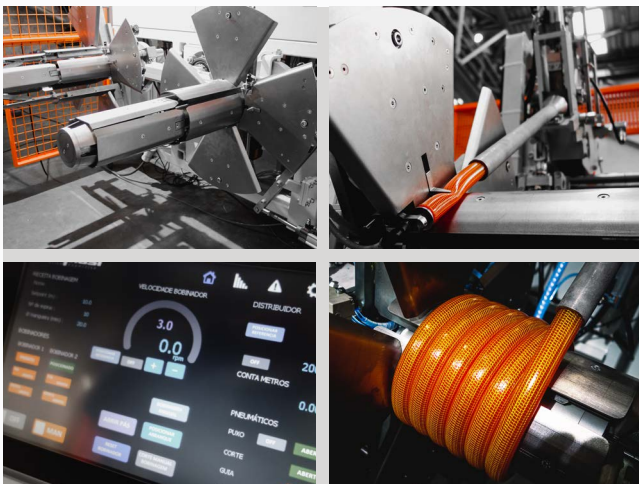

MODEL BM70

Hose ID range [mm]	Hose OD range [mm]	Coil dimensions range [mm]			Maximum linear speed [m/min]
		ID	Max. OD	Width (depth)	
Ø9 to Ø32	Ø12 to Ø40	160 - 300	700	130 - 300	Up to 60

